


Product specification Eurologik French doors

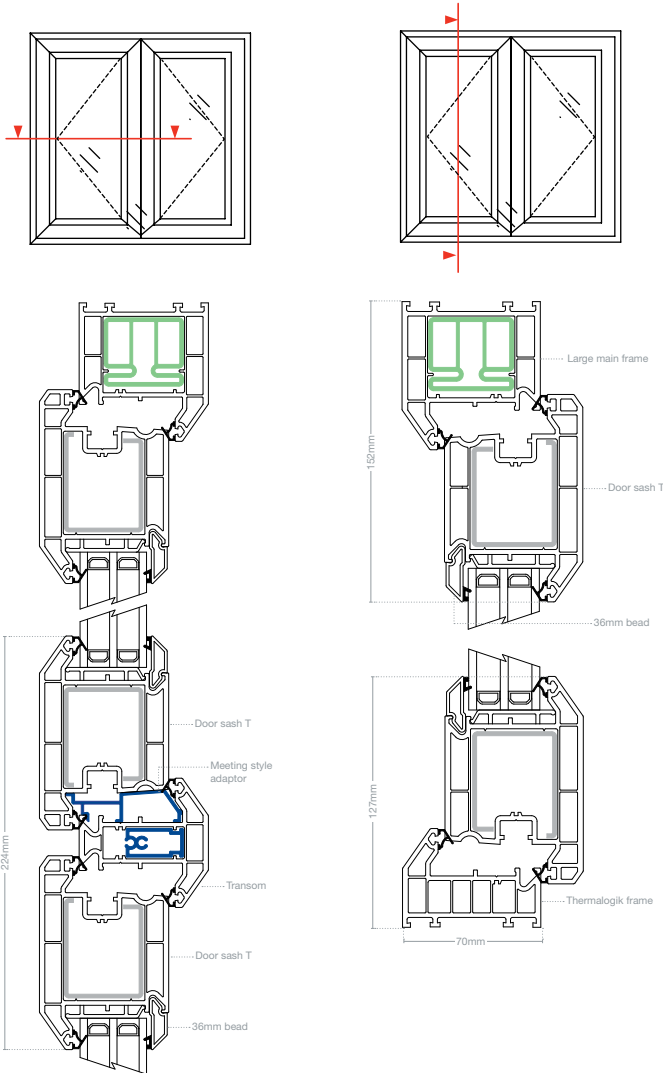

EUROLOGIK FRENCH DOORS TRIPLE GLAZED OUTWARD OPENING, INTERNALLY GLAZED

Profiles

- Eurocell **eurologik** 70mm system
- Large outer with slim threshold

Reinforcements

- PVC-U Thermal Inserts
- Steel and aluminium

Cill options

Standard: 85mm (130mm*), 150mm (195mm*) and 180mm (225mm*)

* When used with cill extender

Accreditations

- Eurocell **eurologik** profile system is BBA certified
- BS EN 12608, PAS 23 /24

Style




Ovolo




Chamfered

Thermal performance



Colour options

Standard colours



Non-standard options

Eurocell profiles are available in any colour from our made-to-order range. These are available on a three-week lead-time.


* White Ash and Irish Oak available in Ovolo styles only. Anthracite Grey and Slate Grey available in Chamfered only

Min / max sizes

If the doors are to be manufactured are outside these sizes, please consult Eurocell's technical department.

System	Width (mm)	Height (mm)
French doors (outer to outer)	Max: 2000 Min: 1200	Max: 2300 Min: 1800

Part M low threshold available

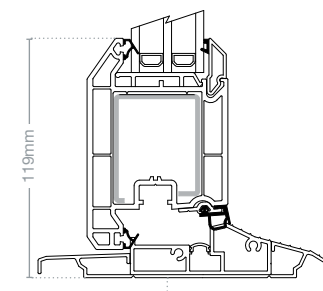

Low threshold assembly EWS 7545A and EWS 7546A