

modus® Technical information Reversible windows



All together better



modus reversible windows are the most thermally efficient in the UK


modus reversible windows have a completely flush sash internally and externally. As the first co-extruded reversible system in the UK, this innovative product delivers enhanced aesthetics as well as being the most thermally efficient in the UK. With a U-value as low as 0.7 achievable with a triple-glazed unit, it is the clear choice for new build and commercial projects.

Min / max sizes	Width (mm)	Height (mm)
Reversible windows	Min: 400 Max: 1500	Min: 563 Max: 1500

Config	Glass 1 (external)	Glass 2 (internal)	Glass 3 (internal)	Gas fill	Spacer bar	Reinforcing	WER	Energy index	U value
4/16/4/16/4	Diamant	Planitherm One	Planitherm One	Argon	SuperSpacer Premium	Full Thermal	A	3	0.8
4/16/4/16/4	Optiwhite	Pilkington KS	Pilkington KS	Argon	SuperSpacer Premium	Full Thermal	A++	30	0.8
4/20/4	Diamant	N/A	Planitherm Total+	Argon	SuperSpacer Premium	None	A	5	1.4
4/20/4	Optiwhite	N/A	Pilkington KS	Argon	SwisSpacer Ultimate	None	A	4	1.4

Contact our Technical department for additional performance specifications

Reversible window Triple-glazed

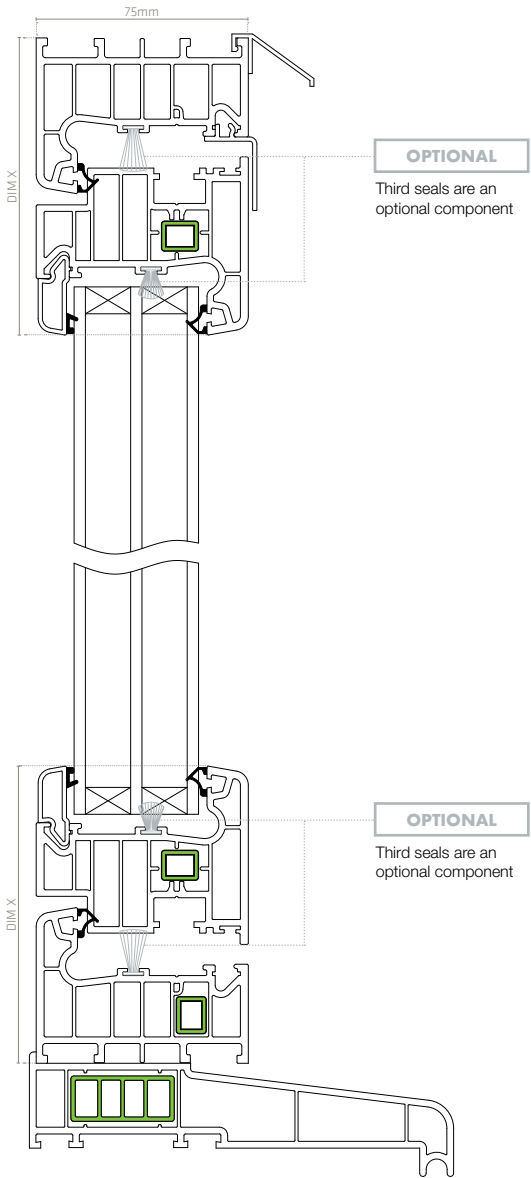

Frame dimension	Dim X
Main Frame (LSF 1021) with Reversible Sash (LSF 1008)	105mm
Large Main Frame (LSF 1006) with Reversible Sash (LSF 1008)	120mm

Reversible window Double-glazed

